


Simple Slope with Water Table

For LUSAS version:	23.0
For software product(s):	LUSAS Bridge plus or LUSAS Civil&Structural plus
With product option(s):	Geotechnical, Nonlinear

Problem Description

This overview example examines the stability of an embankment with a water table. The definition of the water table is covered in detail.

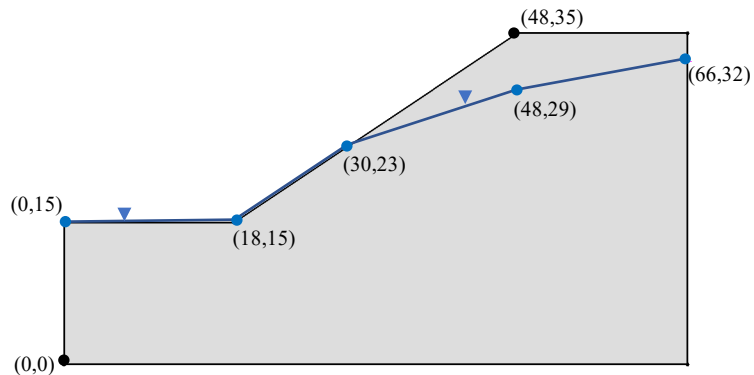

Problem geometry showing water table in blue

Keywords

2D, Plane Strain, Modified Mohr-Coulomb, Phi-c, Phreatic Surface.

Associated Files

Associated files can be downloaded from the user area of the LUSAS website.




- ❑ **simple_slope_with_water_table.lvb** carries out automated modelling of the example.

- Use **File > New** to create a new model of a suitable name in a chosen location.
- Use **File > Script > Run Script** to open the lvb file named above that was downloaded and placed in a folder of your choosing.

Modelling overview

The model is meshed using two phase quadratic triangular plane strain elements (TPN6P). The bottom surface is fully restrained whilst the sides are allowed to displace vertically. A phreatic surface (as shown earlier) is prescribed within the domain with water pressure increasing linearly above and below it.

The following image shows the mesh and boundary conditions.

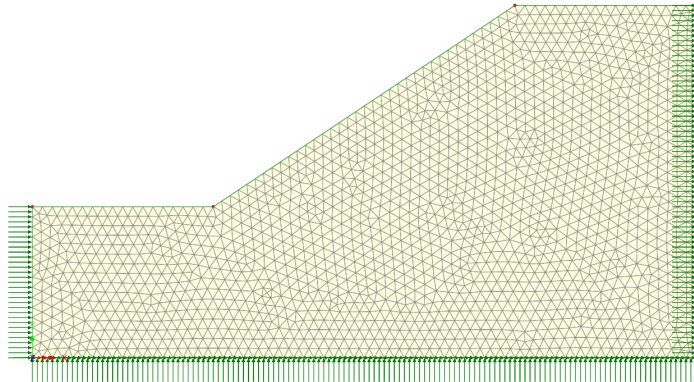

Mesh and boundary conditions

Material Properties

The soil properties are listed in Table 1.

Table 1: Material properties

Mass density	Young's modulus, E	Poisson's ratio, ν	Friction angle, ϕ°	Dilation angle, ψ°	Cohesion, c	Rankine stress, σ_1
1.918 t/m ³	50E3 kPa	0.4	15.0	0	41.65 kPa	150 kPa

Note that the Rankine stress is the Tensile cut-off value (as opposed to the compressive cut-off)

Table 2: Hydraulic properties


Bulk modulus of water	Porosity	Hydraulic conductivity	Density of water	Saturation at residual water content	Saturation at full water content
2.2E6 kPa	0.3	0.1 m/day	1.0 T/m ³	0.0	1.0

Loading Conditions

Gravity loading is applied.

The pore water pressure distribution is generated from a 'Profile Variation'. A single profile relating water pressure to depth is assigned to each of the five points defining the linear segments shown in the Problem Geometry. The profile is extrapolated to cover the top and bottom of the problem domain.


The definition of the pore water pressure distribution is defined by selecting the **Attributes > Loading...** menu item, clicking the radio button **Distributed loads** and then **Water Pressure Distribution** followed by **Next >**.

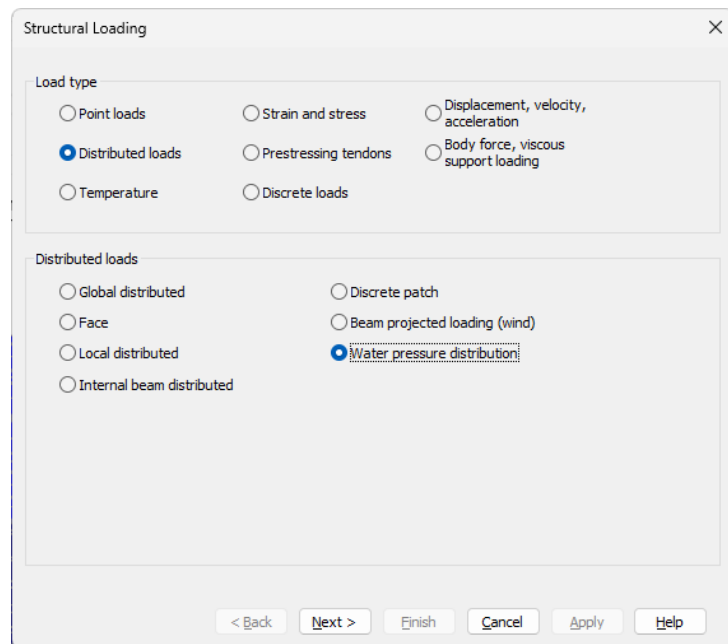

Structural loading dialog

Simple Slope with Water Table


On the resulting Water Pressure Distribution dialog, the radio button **Fully defined by profiles, assigned to continuum** is chosen. In the **Profile variation** dropbox the option **New...** is selected.

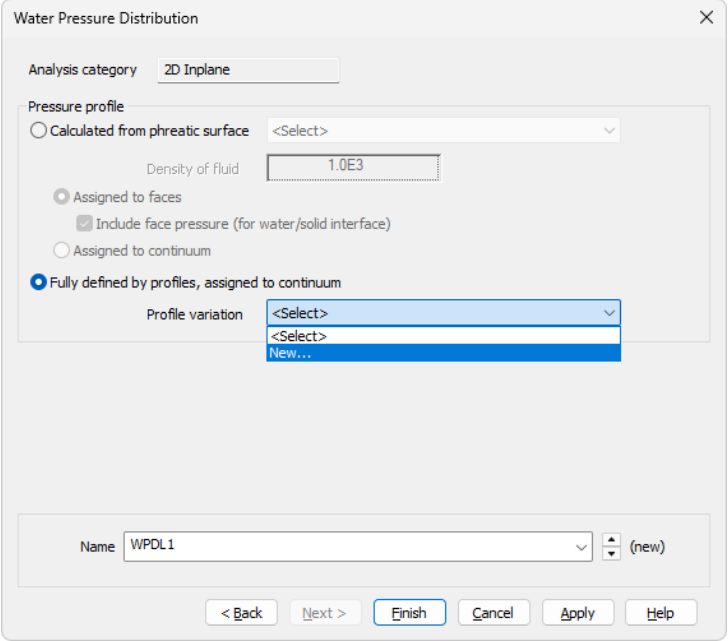

The image shows a software dialog box titled "Water Pressure Distribution". It has a close button (X) in the top right corner. The "Analysis category" is set to "2D Inplane". Under "Pressure profile", there are three radio buttons: "Calculated from phreatic surface" (unselected), "Assigned to faces" (selected), and "Assigned to continuum" (unselected). The "Assigned to faces" option has a sub-option "Include face pressure (for water/solid interface)" which is checked. The "Density of fluid" is set to "1.0E3". The "Fully defined by profiles, assigned to continuum" radio button is selected. Below it, the "Profile variation" dropdown menu is open, showing three options: "<Select>", "<Select>", and "New..." (which is highlighted in blue). At the bottom, there is a "Name" field with "WPD1" and a "(new)" label. Navigation buttons at the bottom include "< Back", "Next >", "Finish" (highlighted), "Cancel", "Apply", and "Help".

Water pressure distribution dialog

On the resulting Variation dialog **Profile variation** is chosen followed by **Next >**.

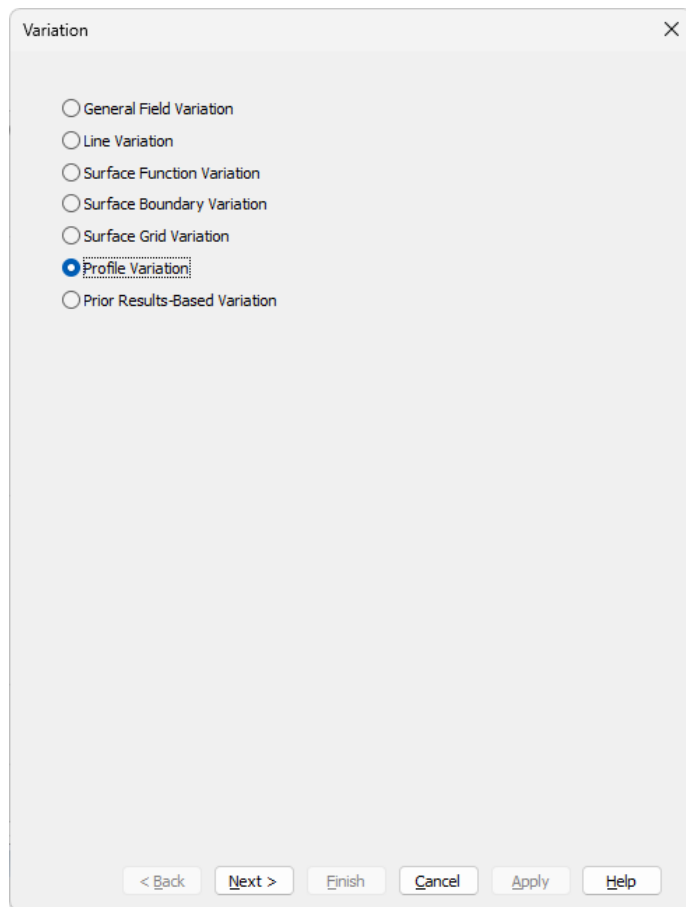

Variation dialog

On the Profile Variation dialog the button **New...** is pressed to define a new variation.

Profile Variation

Analysis category: 2D Grillage/Plate

Vertical axis: Vertical Negative

Available

Included

Profile	x origin	y origin
---------	----------	----------

>> <<

New... Edit...

Evaluation outside range

Before start of profile

- ☒ Treat as error
- ☐ Extend start value
- ☐ Linear extrapolation
- ☐ Use zero
- ☐ Treat as none

After end of profile


- ☐ Treat as error
- ☐ Extend end value
- ☒ Linear extrapolation
- ☐ Use zero
- ☐ Treat as none

Name: Vrn1 (new)

< Back Next > Finish Cancel Apply Help

Profile variation dialog

On the resulting Line Profile Variation dialog values of **(0,0)** and **(1,9.81)** are defined (i.e. the pressure at 1m depth) and given a **Name** of 'water pressure' and **OK** pressed.

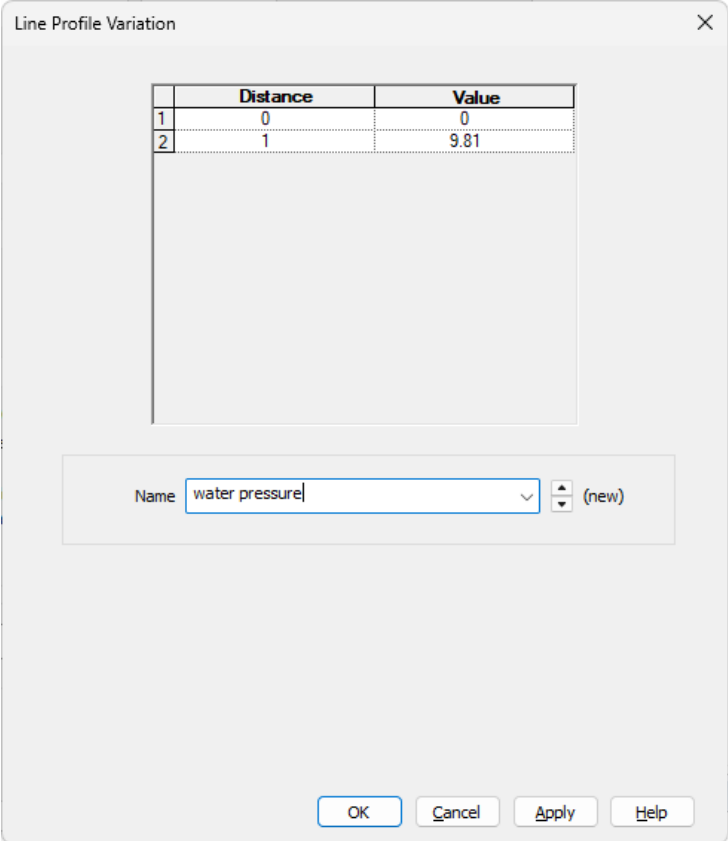

The dialog box titled "Line Profile Variation" contains a table with two columns: "Distance" and "Value". The table has two rows of data. Below the table is a "Name" field with a dropdown menu showing "water pressure" and a "(new)" button. At the bottom are four buttons: "OK", "Cancel", "Apply", and "Help".

	Distance	Value
1	0	0
2	1	9.81

Name: (new)

OK Cancel Apply Help

Line profile variation dialog

Back on the Profile Variation dialog 'water pressure' is added to the Included grid by pressing the 'Add to' button.

Profile Variation

Analysis category: 2D Inplane

Vertical axis: Negative

Available: water pressure

Included:

Profile		x origin	y origin
1	water pressure	0.0	15.0

New... Edit...

Evaluation outside range

Before start of profile

☐ Treat as error

☐ Extend start value

☒ Linear extrapolation

☐ Use zero

☐ Treat as none

After end of profile

☐ Treat as error

☐ Extend end value

☒ Linear extrapolation

☐ Use zero

☐ Treat as none

Name: Vrn1 (new)

< Back Next > Finish Cancel Apply Help

Select profile

In the profile x and y origin fields enter (0,15) to mark the starting point of the profile. The radio button **Linear extrapolation** should be set in the **Before start of profile** section and should also be set in the **After end of profile** section.

Water pressure data should be added to the grid for each of the points (18,15), (30,23), (48,29) and (66,32). 'water table' is entered in the **Name** field and **Finish** pressed.

Profile Variation

Analysis category: 2D Inplane

Vertical axis: Negative

Available: water pressure

Included:

	Profile	x origin	y origin
1	water pressur	0.0	15.0
2	water pressur	18	15
3	water pressur	30	23
4	water pressur	48	9
5	water pressur	56	32

New... Edit...

Evaluation outside range

Before start of profile

☐ Treat as error
☐ Extend start value
☒ Linear extrapolation
☐ Use zero
☐ Treat as none

After end of profile

☐ Treat as error
☐ Extend end value
☒ Linear extrapolation
☐ Use zero
☐ Treat as none


Name: water pressure (new)

< Back Next > Finish Cancel Apply Help

Water pressure distribution definition complete


Back on the Water Pressure Distribution dialog 'water table' is entered in the **Name** field and **Finish** pressed.

Simple Slope with Water Table

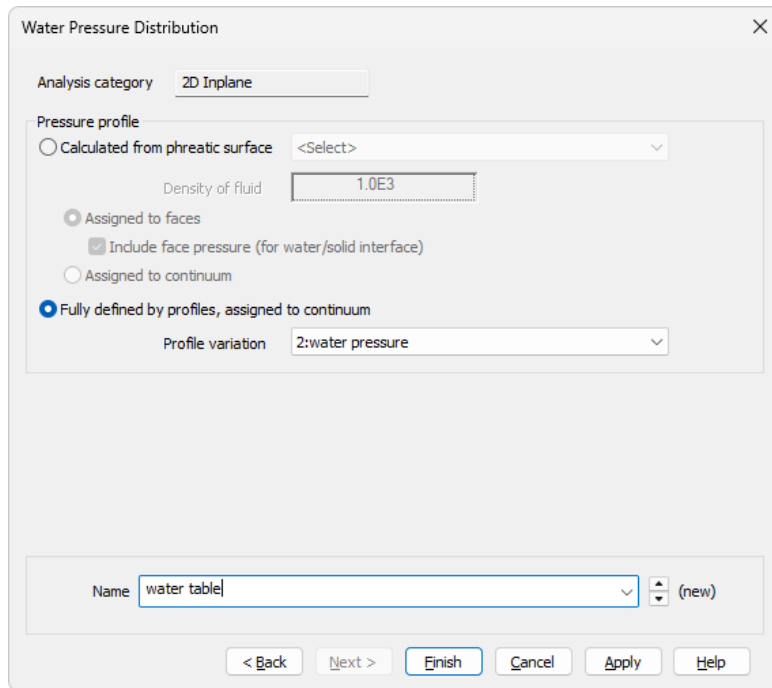

Water pressure distribution loading completed

The resulting water table load is added to the Attributes Treeview and then assigned to all surfaces in the model.

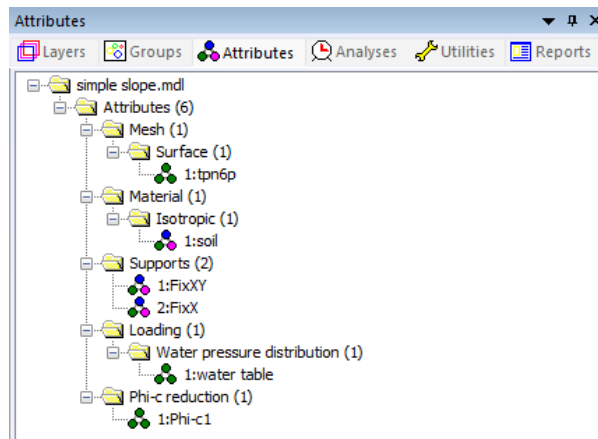

Water pressure load in Attributes treeview

In this example the Phi-c ‘Minimum change in safety factor’ (specified using the menu item **Attributes > Phi C Reduction**) is increased from 0.01 to 0.001 so that results obtained can be compared (at the end of the example) with those from other software, which are quoted to three decimal places.

Running the Analysis




Press **OK** to run the analysis.

Viewing the Results

Analysis results are present in the Analyses  Treeview. The ‘Initial conditions’ loadcase will be set active.


- Turn off the display of the loading to see the following view of the model.

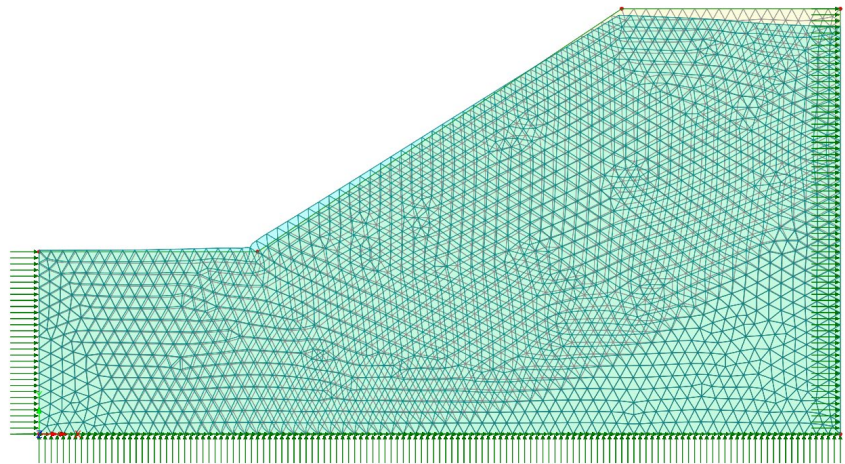

Pore water pressure distribution

- Turn off the geometry and deformed mesh layers.
- Add a contours layer to display entity **Stress - Two phase plane strain** and component **PRES**.

Simple Slope with Water Table

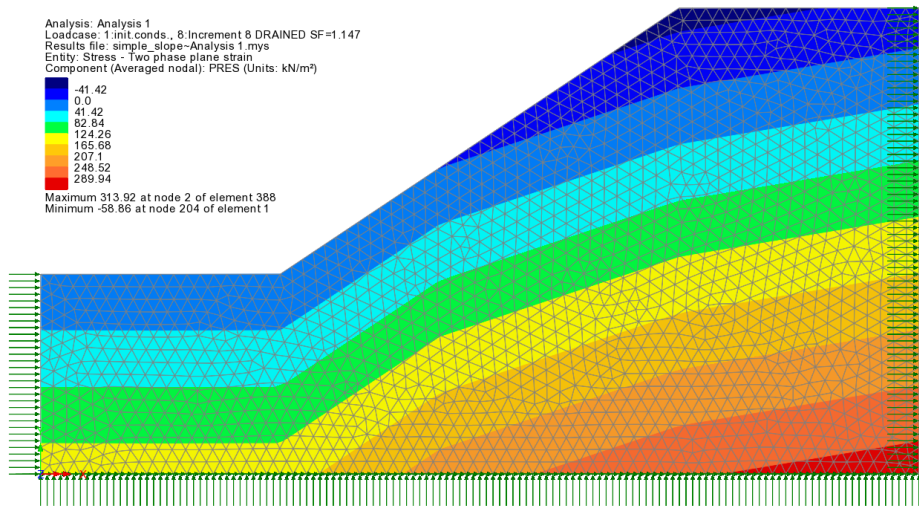


Pore water pressure distribution

Effective strain


- Change the contours layer to show contours of entity **Strain – two phase plane strain** and component **EE**.

At the start of the phi-c analysis the slope is already showing signs of failure.

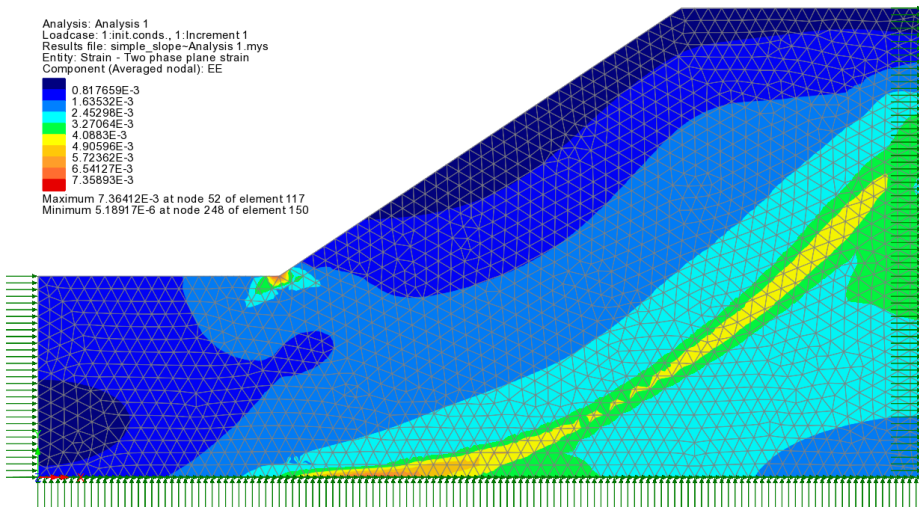


Effective strain at safety factor 1.0

At the safety factor $SF=1.1$ the failure surface is well established but failure is contained by the fixed boundary on the left-hand side.

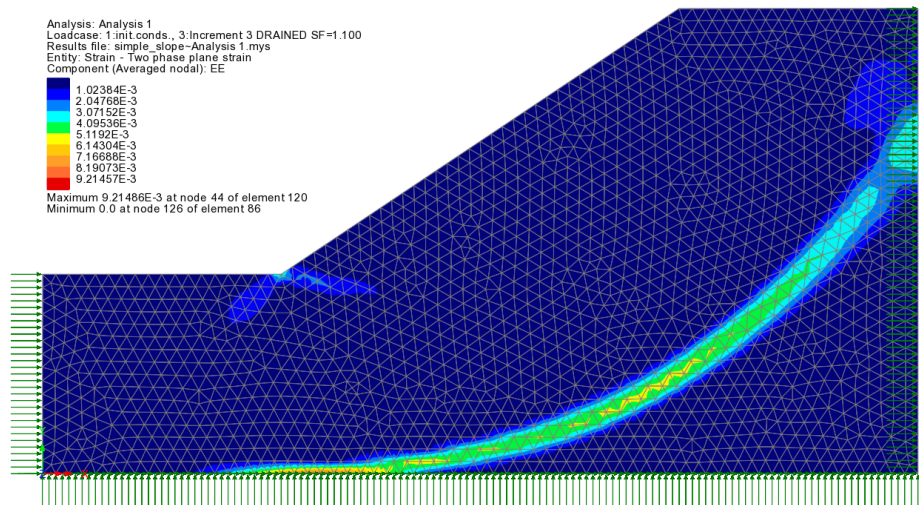


Effective strain at safety factor 1.1

At $SF=1.145$ the upper failure surface starts to form.

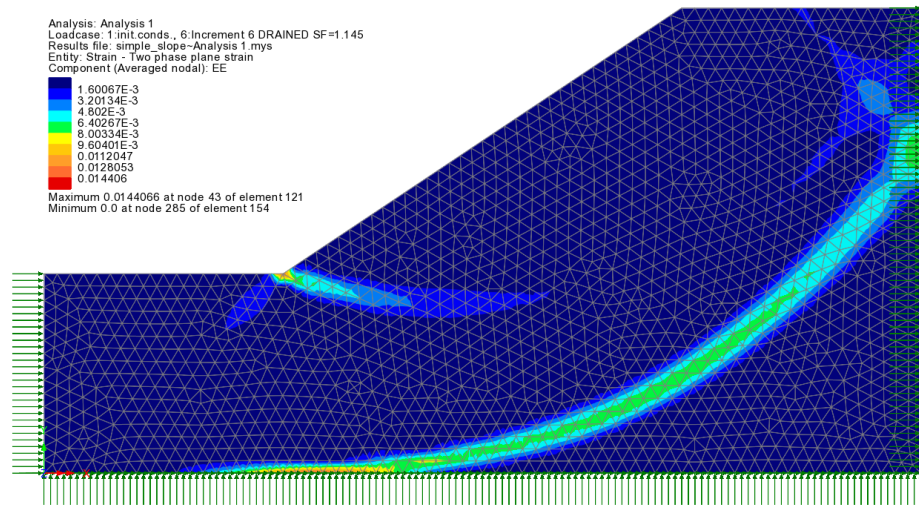

Effective strain at safety factor 1.145

At SF=1.147 the upper failure surface is nearly fully complete.

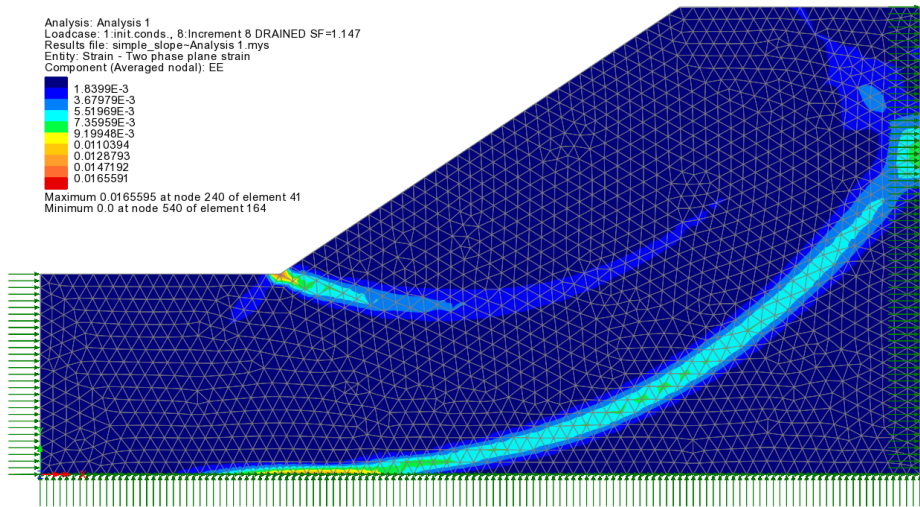

Effective strain at safety factor 1.147

Verification

Table 3 shows the factor of safety obtained compared to other methods, with LUSAS giving a slightly higher value.

Table 3: Factor of safety for different solution methods

Method	Factor of safety	
	Circular surface	Non-circular surface
Bishop	1.117	
Janbu simplified	1.046	
Janbu corrected	1.131	
Spencer	1.118	
RS2	1.09	
LUSAS Modified Mohr Coulomb	1.147	